


GCheat®

The highest degree.



旋入式加热器

GC-screw screw-in heaters

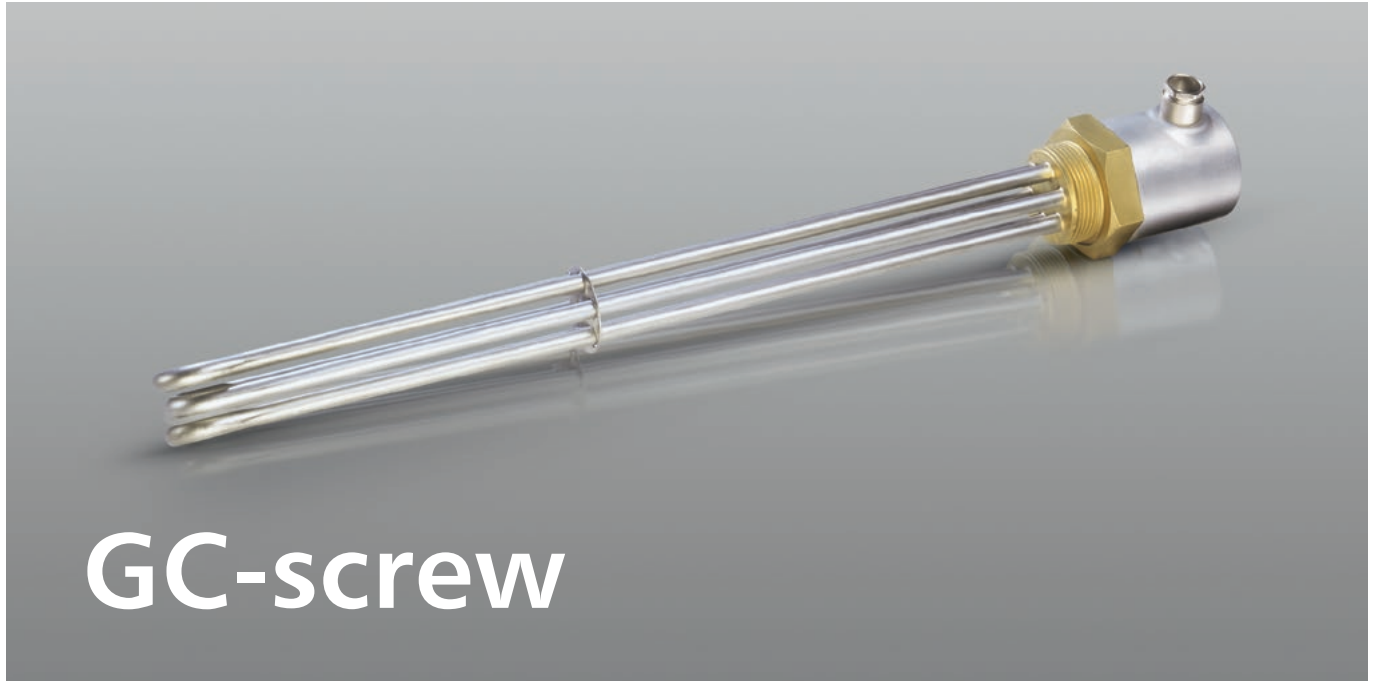

GC-screw旋入式加热器 GC-screw screw-in heaters

高性能，适合于较短浸入长度的应用

内置GC管的GC-screw旋入式加热器专为加热液体和气体介质而设计，特别是当要求高性能且浸入长度短时。标准螺纹G 1½”，但是其他螺纹，如1¼”或2”，直到2½”，也可以实现。GC-screw旋入式管形加热器是一种U形高密度管形加热器，加热器焊接在一个螺纹接套上。GC管的外径是6.5mm或8.5mm。我们能生产带控制器、限制器或其他保护装置的GC-screw。控制类型取决于具体应用。GC-screw也能由独立的热电偶控制。

High performance for shorter immersion length

GC-screw screw-in heaters with built-in GC-tube tubular heaters are especially designed for heating liquid and gaseous media, in particular when high performance combined with a short immersion length is required. The standard thread G 1½”, but other threads, such as 1¼” or 2”, up to 2½”, are possible. The GC-screw, screw in tubular heater is a U-formed high density tubular heater, soldered or welded onto a threaded nipple. The outer diameter of the GC-tube is 6.5 mm or 8.5 mm. We can produce the GC-screw with a controller, limiter or other protection devices. The type of regulation depends upon the application. The GC-screw can also be controlled via a separate thermocouple.

材料综述 Material overview

GC管的管式加热器 GC-tube tubular heater

- 不锈钢1.4541、1.4828、1.4876、2.4858
Stainless steel 1.4541, 1.4828, 1.4876, 2.4858

螺丝 Screws

- 黄铜
Brass
- 不锈钢
Stainless steel

壳体 Housing

- 铝
Aluminium
- 塑料
Plastic



GC-heat Gebhard GmbH & Co. KG

Industriestraße 34

51545 Waldbröl / Germany

Phone +49 (0)2291 796-0

Fax +49 (0)2291 796-69

www.gc-heat.de

■ made
■ in
■ Germany

